


### Spirovent® Senior Microbubble™ Eliminator

Job Name:  
Engineer:  
Contractor:  
Representative:

Tag	Model	Flow	Size	Location

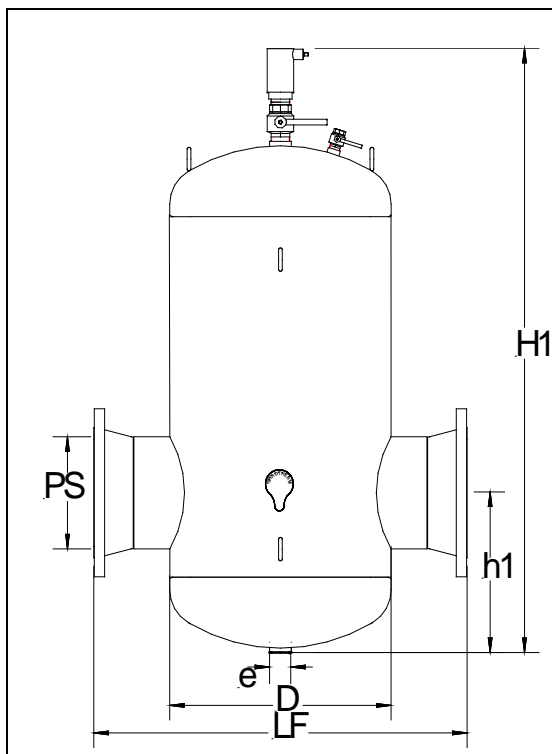

#### Specifications:

Shell	Steel
Vent Head	Brass
Float	Non-Ferrous
Seal	Viton
O Ring	Viton
Skim Valve	Brass
Coalescing Medium	Copper
Max. Working Pressure	150 psig
Max. Operating Temperature	270°F

#### Notes:

PS - Pipe Size	14"	16"	18"	20"	24"	30"	36"
D (inches)	28	32	36	40	48	60.0	72
H1 (inches)	74	82	91	99	116	142	167
h1 (inches)	19	21	24	26	31	39	46
LF (inches)	45	50	56	61.4	72	85.2	102.8
e (inches)	2	2	2	2	2	2	2
Weight (lbs)	990	1340	1750	2650	4140	7050	11190
Rec. Flow (gpm)	1700	2200	2800	3500	5100	8000	11500
Model VSR----FA*	1400	1600	1800	2000	2400	3000	3600

(Dimensions for reference only)

\*Flanged ASME Section VIII, Division 1 Stamped and Registered