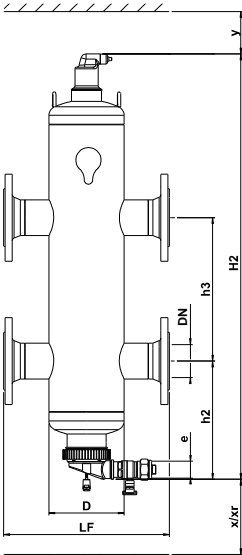


**Spirovent Quad® Hydraulic Separator,
Air Eliminator, Dirt Separator with Magnet**

Job Name:
Engineer:
Contractor:
Representative:

Tag	Model	Flow	Size	Location

	<p>Specifications:</p> <table border="1"> <tr> <td>Body</td> <td>Steel</td> </tr> <tr> <td>Vent Head</td> <td>Brass</td> </tr> <tr> <td>Float</td> <td>Non-Ferrous</td> </tr> <tr> <td>Seal</td> <td>Viton</td> </tr> <tr> <td>O Ring</td> <td>Viton</td> </tr> <tr> <td>Coalescing Medium</td> <td>Copper</td> </tr> <tr> <td>Magnets</td> <td>Neodymium</td> </tr> <tr> <td>Max. Working Pressure</td> <td>150 psig</td> </tr> <tr> <td>Max. Operating Temperature</td> <td>270°F</td> </tr> </table> <p>Notes:</p>	Body	Steel	Vent Head	Brass	Float	Non-Ferrous	Seal	Viton	O Ring	Viton	Coalescing Medium	Copper	Magnets	Neodymium	Max. Working Pressure	150 psig	Max. Operating Temperature	270°F
Body	Steel																		
Vent Head	Brass																		
Float	Non-Ferrous																		
Seal	Viton																		
O Ring	Viton																		
Coalescing Medium	Copper																		
Magnets	Neodymium																		
Max. Working Pressure	150 psig																		
Max. Operating Temperature	270°F																		

DN - Pipe Size		2"	2 1/2"	3"	4"	5"	6"
D	inch	6.6	6.6	8.6	8.6	12.8	12.8
H2	inch	32.0	36.0	39.0	50.0	61.0	70.0
h2	inch	9.4	9.9	10.6	13.8	17.4	19.9
h3	inch	9.5	12.0	14.0	18.0	22.0	26.0
LF	inch	15.0	15.0	20.0	20.0	26.0	26.0
e	inch	1	1	1	1	1	1
x	inch	3	3	3	3	3	3
y	inch	3	3	3	3	3	3
Weight	lbs.	90	106	156	207	283	333
Rec. Flow	GPM	60	90	140	240	370	540
Model VDX	FAM	200	250	300	400	500	600

(Dimensions for reference only)

Flanged ASME Section VIII, Division 1 Stamped and Registered